


ProCair Plus
and Optional ES Control Unit
Non-Powered, Convertible Alternating Pressure Therapy System



ProCair Plus and Optional ES Control Unit

Non-Powered, Convertible Alternating Pressure Therapy System

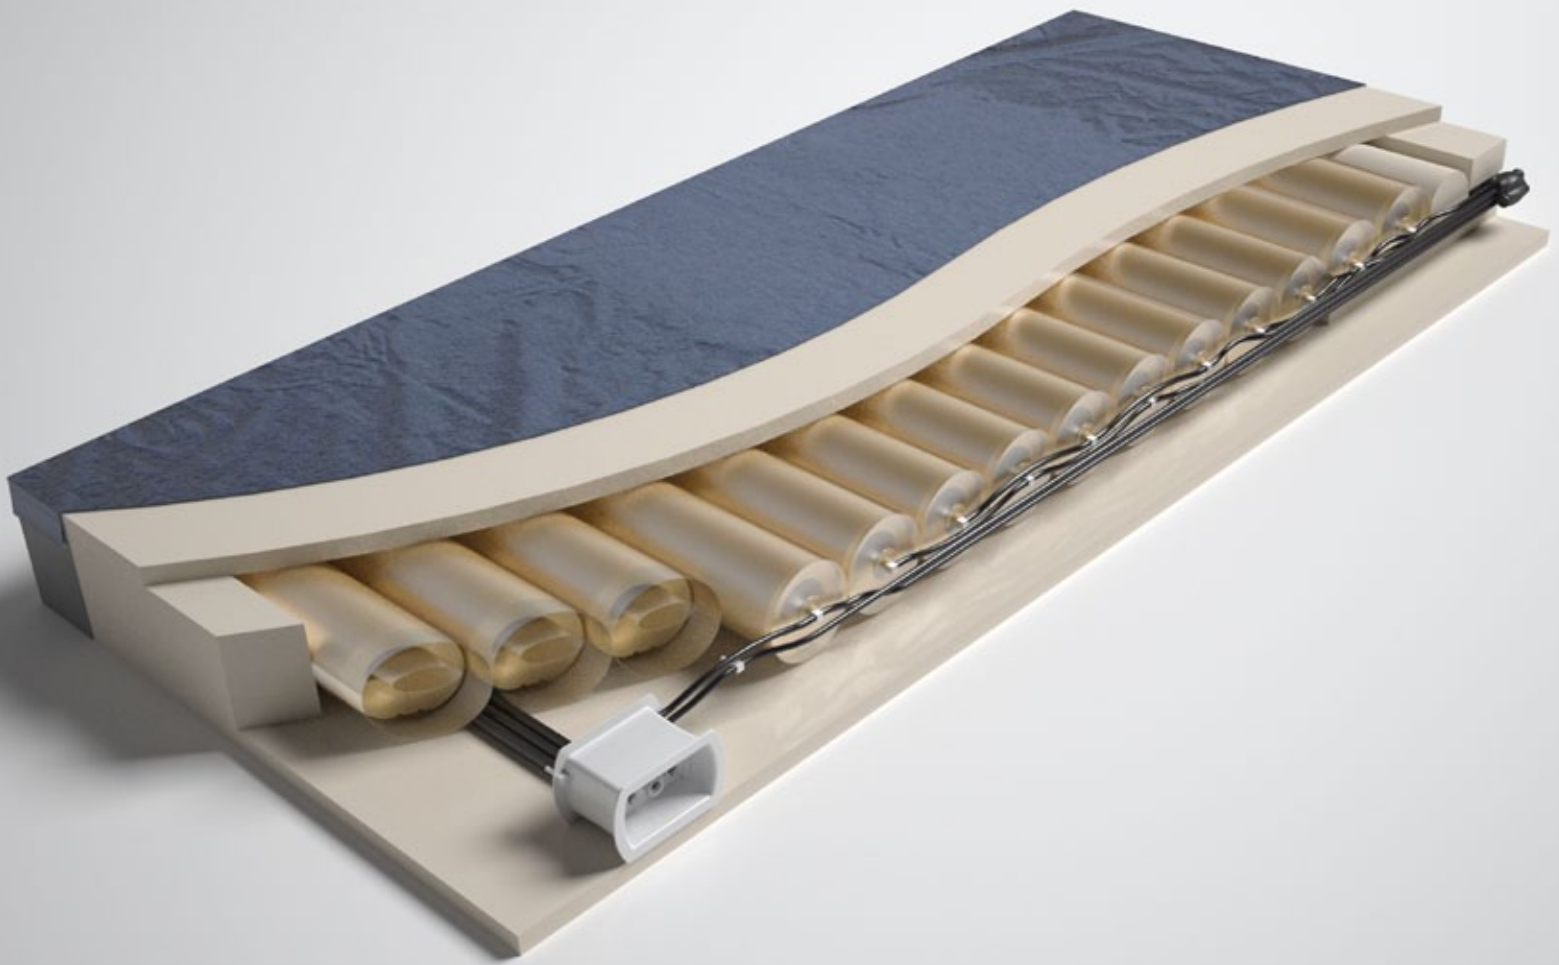

Features and Benefits

Mattress Therapy Features

- Three-zoned system (shoulder, torso and foot) inner air core automatically adjusts to each patient's body profile and weight
- Fifteen cells with 14 providing alternating pressure therapy with optional control unit
- P.R.O. Technology valve maintains optimal air pressures in each therapy zone for superior pressure redistribution regardless of patient weight and profile
- One-inch viscoelastic topper enhances pressure redistribution and patient comfort
- Surrounding firm perimeter provides stability during patient care and contributes to patient safety by eliminating gaps between frames and siderails
- Therapy pad with these unique qualities:
 - Fluid proof and stain resistant
 - Low friction and low shear surface
 - Zippered construction
- Available in multiple widths and lengths
- Meets flammability standards TB 117, TB 129, 16 CFR 1633 and BFD IX-11



Optional ES Control Unit

- Converts your ProCair Plus to alternating pressure therapy to enhance patient comfort and wound healing
- Three alternating pressure zones, including the delicate heel section for optimal pressure redistribution
- Three modes of operation – *Autofirm*, *Powered* (static) and *Alternating*
 - *Autofirm* assists patients and caregivers during patient transfer and treatment
 - *Powered* control settings for eight levels to maximize patient compliance and promote healing
 - *Alternating* cycle time options of 5, 10 and 15 minutes
- Closed loop control system eliminates concerns of changes in mattress interface pressure due to patient repositioning and ambient temperature changes

Clinical Indications

Pressure Relief: Stage I – II Pressure Ulcers¹; Rehabilitation; Burns; Neurology; Dermatology; Amputations

Pain Management: AIDS; Arthritis; Oncology

¹Stage II in non-powered mode and up to uncomplicated Stage III or IV using alternating pressure mode with optional control unit based on individual patient assessment.

Technical Specifications

Maximum Weight Capacity*: 500 lbs

Control Unit

Weight: 11 lbs.

Dimensions: 13.5"(W) x 9"(H) x 8.5"(D)

Mattress Dimensions

36"(W) x 80"(L) x 7"(D)

36"(W) x 84"(L) x 7"(D)

42"(W) x 80"(L) x 7"(D)

Agency Approvals (ES Control Unit)

UL Classified: UL 60601-1 CAN/CSA C22.2 No. 601.1-M90

Electrical Specifications (ES Control Unit)

120V AC, 60 Hz, 0.6A

Environmental Conditions

Operating Conditions

Ambient Temperature: +10°C to +40°C

Relative Humidity: 30% to 75% Non-Condensing

Storage and Shipping Conditions

Ambient Temperature: -10°C to +40°C

Relative Humidity: 10% to 100%

*Mattress weight capacity only; total weight must not exceed bed frame manufacturer's specified load capacity.

Joerns reserves the right to change specifications without notice.